


CALSTIK™ INSTRUCTIONS FOR USE

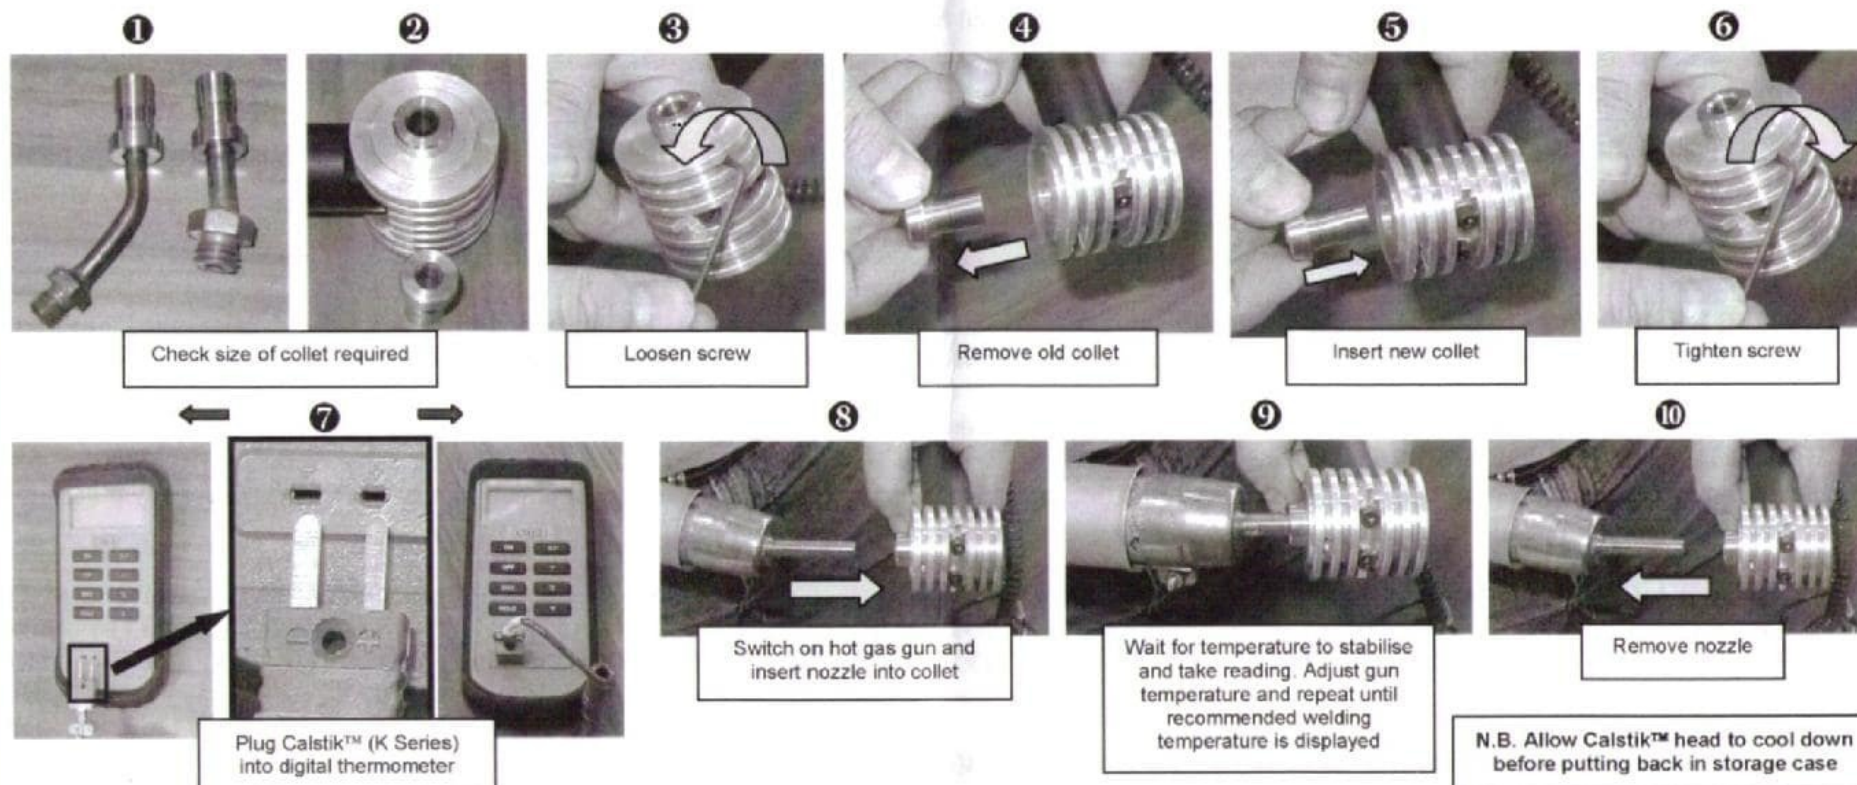

In order to produce hot gas welds of consistent quality it is imperative that the welding temperature is known.

The Calstik™ is designed to measure the temperature at the centre of the gas flow 5mm inside the nozzle of the hot gas gun, as specified in EN 13705 and DVS 2207-3.

WARNING: CALSTIK™ HEAD MAY BE HOT. HOLD BY INSULATED HANDLE ONLY

